

TOP SLOT CHANNEL

GENERAL INFORMATIONS

Depending on flow rate and load class required, stainless steel top slot can be used for different types of channels made from polymer, concrete, GRP or plastic.


The system after installation is totally secure and resistant to vandalism, which makes it suitable for applications in all public areas. This solution is also perfect for using against building facades and in pedestrian areas thanks to the narrow heelsafe slot.

Product features can be adjusted to meet required loading classes From A15 through B125 up to C250.

Material thickness used for production varies from 1 up to 3 mm.

APPLICATION

- commercial developments
- public areas
- car parks
- pedestrian zones
- residential areas
- landscaping

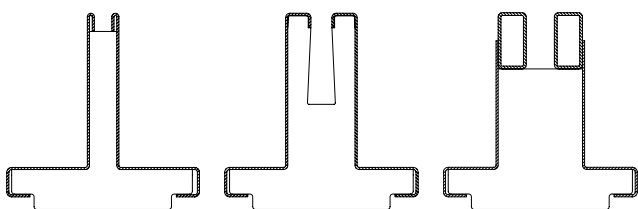

FINE

SMART

SQUARE



ADVANTAGES

- enforced top of the slot
- complete product line
- top slot gratings and revision boxes are easy for cleaning and maintenance
- easy installation
- installation possible with any paving material
- fast removal of surface water
- aesthetic look and durability
- parameters can be adjusted to the Clients requirements